

PORTABLE HAZMAT CONTAINER

(L 20'6" x W 8' x H 11'2")

**FOR THE SAFE STORAGE OF DRILLING FLUIDS,
CHEMICALS, AND OTHER HAZARDOUS WASTE**

OUR PORTABLE HAZMAT CONTAINERS OFFER THE BEST, LOW-COST SOLUTION FOR THE SAFE STORAGE OF LIQUID HAZARDS.

- Safe secondary containment sump for ground water protection,
- Meets fire safety requirements,
- Minimizes liability, and safeguards your personnel , and complies with federal, state and local regulations. Meets or exceeds code requirements, and generally does not need building permits to deploy.
(Local jurisdictions have the final authority to override.)


FEATURES:

- Designed to store flammables, corrosives, combustibles, chemicals, acids, and pesticides,
- Internally dimensioned for double stacking of 55-gallon drums
- Designed for forklift loading,
- Can be relocated






55 Gallon Drums on pallets can be stacked two high! This exceeds the internal height of a ISO high cube shipping container!

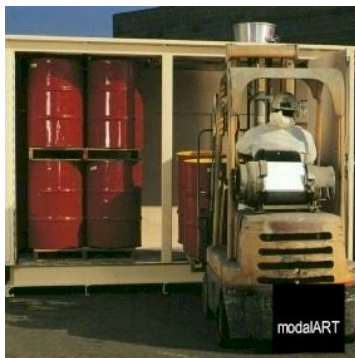


Drawing date accurate as of May 23, 2018

[Not to scale]


FRONT VIEW

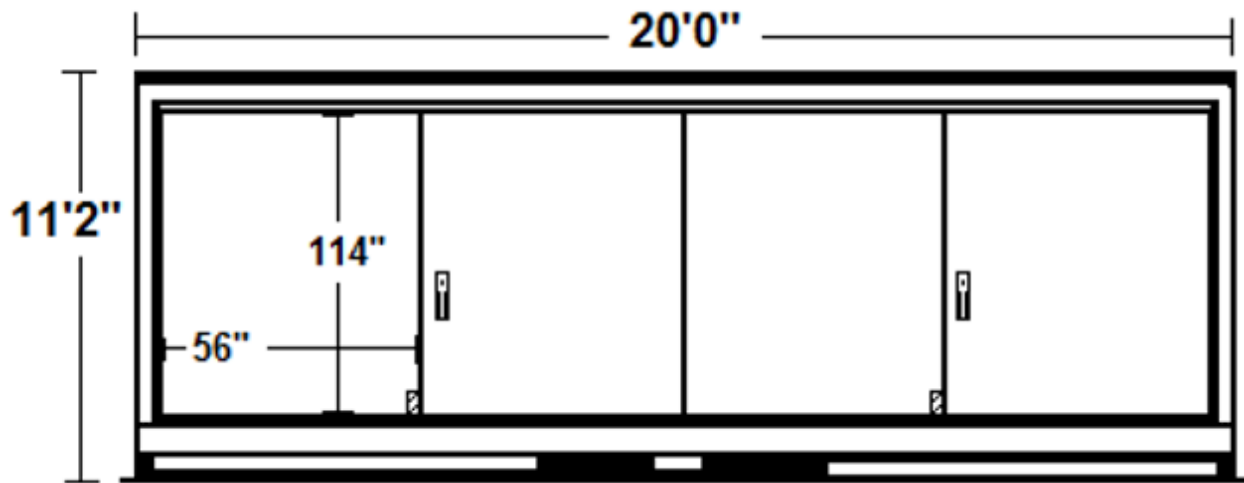


BACK VIEW - We also offer a lower priced single walled construction.

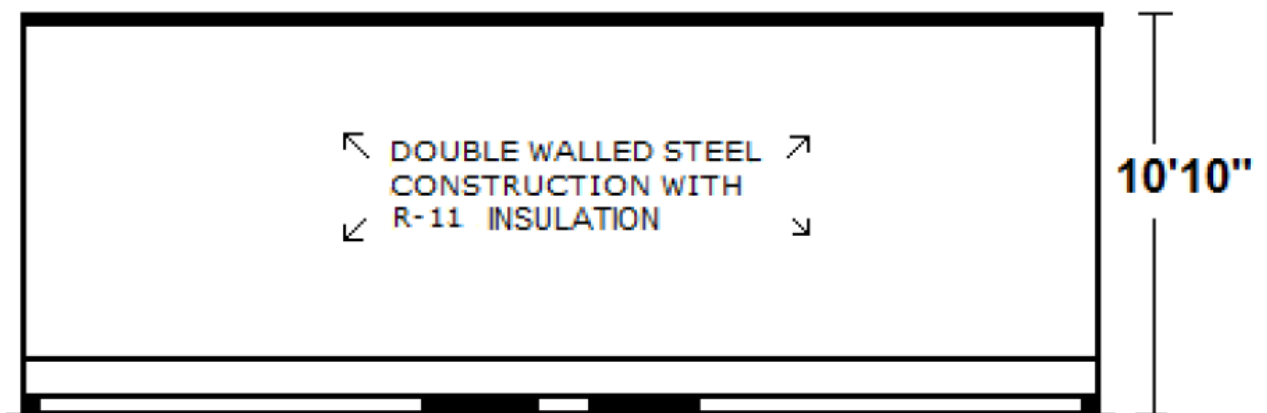

TOP VIEW - Note that heater is an optional feature.

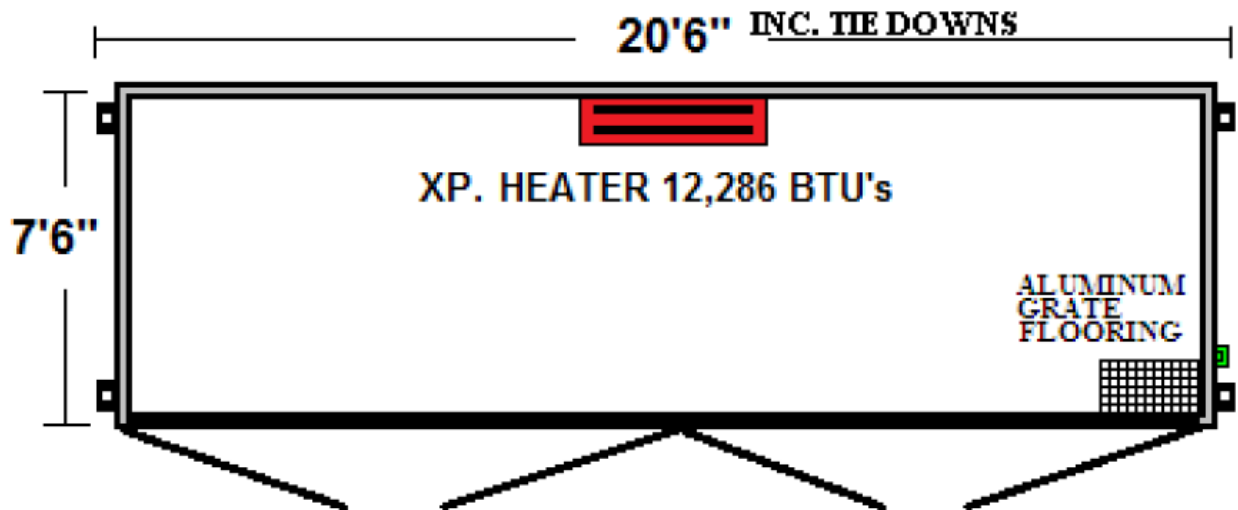

RIGHT SIDE VIEW

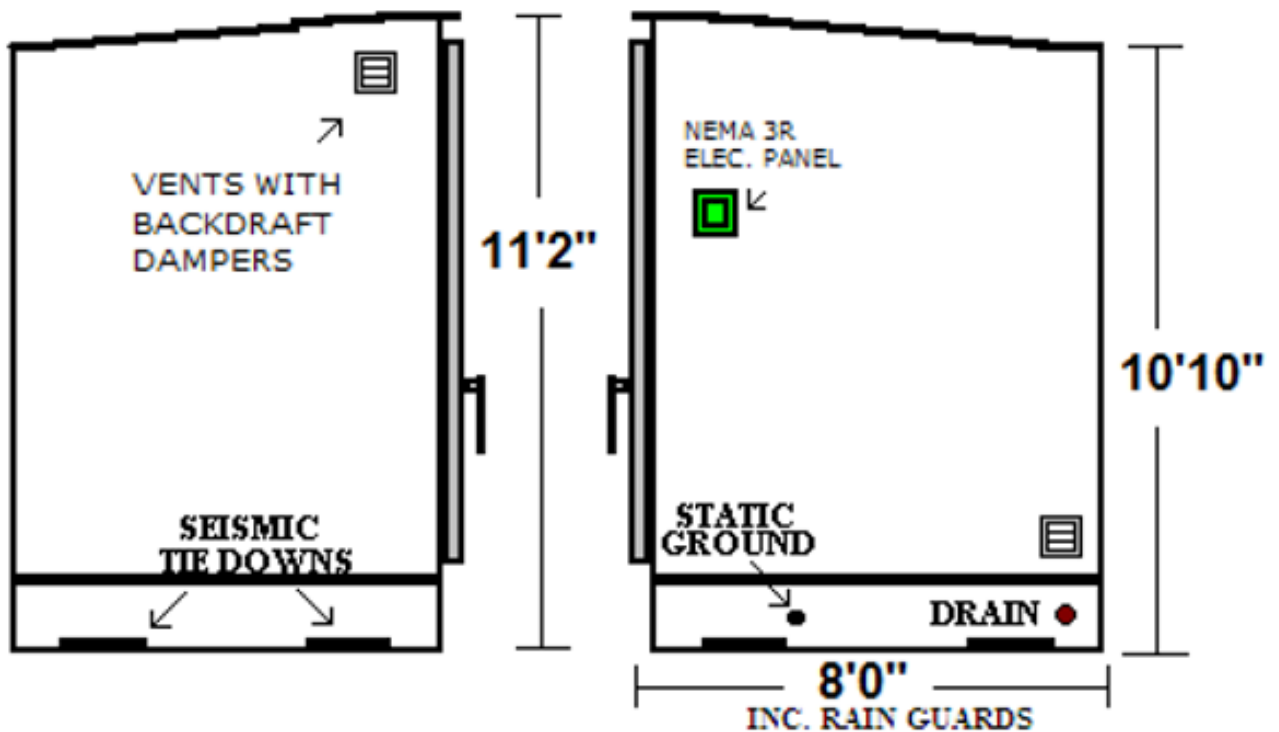

We can also design the units to fit 2 totes or pallets for 8'6" inside dimensions. That would make the outside approx 9'6", which is no problem for shipping, though you would request a permitted load.

MODALART PORTABLE US HAZMAT CONTAINER SPECIFICATIONS

1. FACTORY MUTUAL APPROVED^{*)} TO MEET FMRC CLASS 6049 (NFPA 30).
2. COMPLIES WITH IBC, IFC, EPA, NFPA AND OSHA CODES AND REGULATIONS FOR COMPLIANCE IN DESIGN.
3. DIMENSIONS: 20'6" X 8' X 11'2" (L-D-H)
4 - DOORS 56" X 114" (L-H) WITH 3 POINT LOCKS
WEIGHT: 8,200 LBS
4. ALL MATERIALS MUST BE NEW, UNUSED, NON-COMMERCIAL GRADE ASTM A570 AND COMMERCIAL GRADES ASTM569 AND ASTM A36 STEEL.
5. SINGLE SKIN, 12 GAUGE WELDED STEEL CONSTRUCTION. SUMP BUILT OF 10 GAUGE STEEL. ♦ (ALSO AVAILABLE DOUBLE WALLED 11 & 14 GAUGE SIEEL CONSTRUCTION WITH R-11 INSULATION - ASK FOR PRICE)
6. CHEMICAL RESISTIVE COATING CONSISTS INSIDE AND OUTSIDE WITH SALT WATER PRIMER. EPOXY RESIN ON THE BOTTOM 12".
7. SCREENED VENTS.
8. INTERNAL SPILL CONTAINMENT IS 680 GALLON MINIMUM.
9. STATIC GROUND CONNECTION ON ALL UNITS.
10. SPILL CONTAINMENT DRAIN ON ALL UNITS IS A MINIMUM OF 4" ABOVE GROUND TO ALLOW DRAINAGE.
11. 4 - DOORS 56" X 114" (L-H) WITH 3 POINT LOCKS.
12. GALVANIZED STEEL FLOORING.
13. UNITS ARE DESIGNED TO BE PORTABLE BY FORKLIFT, WITH FRONT TO REAR LOADING CAPABILITY, WITH FORKLIFT POCKETS.
14. SEISMIC TIE DOWN HOLES ARE 1" DIAMETER
15. ALL UNITS MUST HAVE 3/8" GROUNDING LUGS, SET AT 30" HIGH.
16. EXPLOSION PROOF HEATER 12,286 BTU (CLASS I, DIV I) WITH THERMOSTAT.
17. UNIT COMES IN BAJA BEIGE OR CAN BE PAINTED WITH YOUR DESIRED COLOR
18. FIFTEEN - YEARS WARRANTY ON STRUCTURAL.
19. ONE - YEAR WARRANTY ON COATING.

♦ PRESS RELEASE

♦ HAZMAT CONTAINER ONLINE SPECIFICATIONS

♦ ASK FOR A CUSTOM QUOTE - PLEASE ATTACH YOUR SKETCHES & SPECS

* FM approvals is the independent testing arm of international insurance carrier, FM Global. FM approvals uses scientific research and testing to make sure products conform to the highest standards for safety and property loss prevention. Products that pass get the "FM APPROVED" mark.